
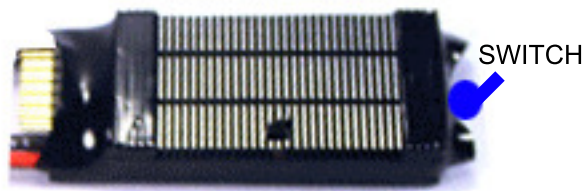


FLEX REG PRO VOLTAGE REGULATOR



How To Connect The Regulator

Connect Battery to Deans Compatible Connector. Refer to the above diagram to connect the included Male to Male Extensions from the Regulator to the Rx.

Connect the corresponding Servos directly to the Regulator. Make note to follow the pin configuration diagram above when making connections. To increase the Cyclic/Collective Servo voltage, turn the trimmer Clockwise, to reduce the voltage, turn Counter-Clockwise.