


FLEX REG VOLTAGE REGULATOR

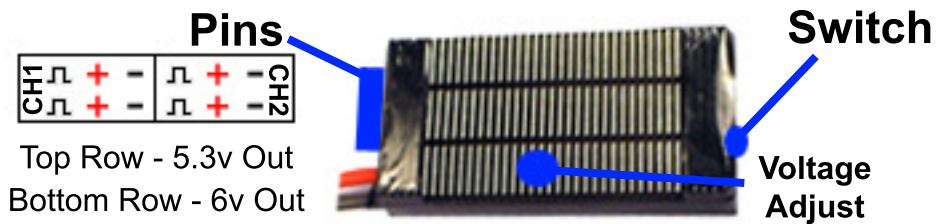

How To Connect The Regulator

Connect Battery to Deans Compatible Connector. Connect one of the included Male to Male Extensions to CH1/Bottom Row on the Regulator and connect the other end to Rx Channel 4. Connect the other included Male to Male Extension to CH2/Bottom Row on the Regulator and connect the other end to your Rx Gyro Gain Channel. Plug Rudder into CH1/Top Row on the Regulator, then plug Gyro Gain into CH2/Top Row on the Regulator. Make note to follow the pin configuration diagram above when making connections.