


## SAFE SWITCH DUO PRO

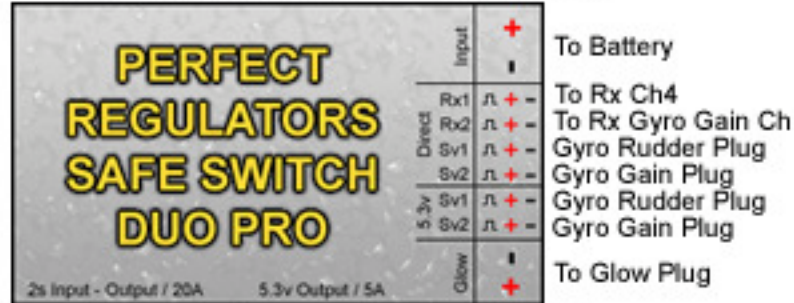

### How To Connect The Switch

Connect Battery to Deans Compatible Connector. Refer to the above label for connecting to the Rx. If running the Gyro & Rudder Servo at Direct Voltage (HV Setup), connect to Sv1/Sv2 under the direct section, if running Gyro & Rudder at 5.3v, connect to Sv1/Sv2 under the 5.3v section. Make note to follow the pin configuration when making the connections.

## SAFE SWITCH DUO PRO SWITCH

Green LED  
ON - Regulator On  
OFF - Regulator Off

Glow Driver Push Button  
Depress - 10 Second Glow  
Red LED Indicates Glow

